Deliver to:		Deliver to:	
Name:		Name:	
Street:		Street:	
Town:	Postal code:	Town:	Postal code:
E-Mail:		E-Mail:	
Tel:	Fax:	Tel:	Fax:

Order date:	Marked for:
Purchase order:	
Number required:	Sunrise order no:

CE

☐ Order
☐ Calculation
☐ Built 4 me

● = Standard   ☐ = Cost option
L = Extended delivery time   O = No cost option

Customer service fax no.:+497253 980-222
Max. user weight: 85 kg

Art. no.:843900001-000

USER WEIGHT [   ] kg
Mandatory information to ensure correct configuration

**Please consult our colour catalogue, to review your colour choice at the end of the order form**

Basic price

CLIENT MEASUREMENT

Seat width in mm

Seat depth in mm	220	240	260	280	300	320	340	360	380	400	
240	O	O	O	O	O	O	O	O	O	O	+20 mm
260	O	O	O	O	O	O	O	O	O	O	short frame
280	O	O	O	O	O	O	O	O	O	O	
300	O	O	O	O	O	O	O	O	O	O	
300	O	O	O	O	O	O	O	O	O	O	long frame
320	O	O	O	O	O	O	O	O	O	O	
340	O	O	O	O	O	O	O	O	O	O	
360	O	O	O	O	O	O	O	O	O	O	
380	O	O	O	O	O	O	O	O	O	O	
400	O	O	O	O	O	O	O	O	O	O	

+40 mm   Straight frame starting at 260 mm

Your rear seat height can only be between 0 mm and 120 mm below your front seat height:

i.e. rear seat height CANNOT be above front seat height

i.e. rear seat height CANNOT be more than 120 mm below front seat height

- More info, see first back page

4"& 5" solid, 4" & 5" soft roll and 5" & 6" soft solid are only available with 45 mm fork

Front seat height in mm

Front Castor	fork (lenght x width)	370	380	390	400	410	420	430	440	450	460	470	480	500
4"	111 mm x 45 mm		O	O	O	O								
	123 mm x 45 mm (3)			O	O	O	O							
	111 mm x 32 mm	O	O	O	O	O								
	138 mm x 45 mm (1) (3)					O	O	O	O					
	174 mm x 45 mm (1) (2) (3)							O	O		O	O		
5"	111 mm x 45 mm				O	O	O							
	123 mm x 45 mm (3)				O	O	O	O	O					
	111 mm x 32 mm				O	O	O							
	138 mm x 45 mm (1) (3)					O	O	O	O					
	174 mm x 45 mm (1) (2) (3)							O	O	O	O	O		
6"	111 mm x 45 mm					O	O							
	123 mm x 45 mm (3)					O	O		O					
	138 mm x 45 mm (1) (3)					O	O		O	O				
	174 mm x 45 mm (1) (2) (3)							O	O	O	O	O		

Rear seat height in mm

Rear wheel	Rear wheels	320	330	340	350	360	370	380	400	410	420	430	440	450	460	470
	20" (4)			O	O											
	22"					O	O	O	O	O		O	O	O		
	24"								O	O	O	O	O			O

☐ **Lightweight Package**   YNG090600
incl Proton wheel and lightweight sideguard

☐ **Safari Package**   YNG090601
incl Aluminium sideguard with fender (YNG040212)
and Safari wheel lock (YNG060105)

- Please note the procedure of the measurement is from the back

- All measurements are in mm and without a cushion

(1) **only aluminium fork available**
(2) **only grey available**
(3) **fork compatible with additional drive**
(4) **only Proton wheels/Right Run tyres**

For more information
visit our webpage
www.SunriseMedical.eu
© Sunrise Medical 2024

Please follow measuring method:

The following method is recommended on the basis of extensive practical experience.

Deviations are possible in individual instances

Seat width:	Seat depth:	Back height:	Lower leg length:
a) For the user:	**a) For the user:**	**a) For the user:**	**a) For the user:**
Allow space of sideguard to pass vertically between hip and sideguard on each side (approx. 10 - 20 mm altogether)	When sitting upright: leave space for 2-3 fingers between front edge of seat upholstery and back of knee (approx. 30 - 60 mm). Care must be taken with adjustable upholstery	Measured from the seat, including cushion, to **no more** than one finger (10 - 20 mm) below the lower shoulderblade. **Important!** The back height depends on the degree of disability	With legs angled at right angles, from back of knee to bottom of shoe sole
b) On the wheelchair:	**b) On the wheelchair:**	**b) On the wheelchair:**	**b) On the wheelchair:**
From outside frame tube to outside frame tube	From back tube to front of seat upholstery	From seat tube to upper edge of backrest upholstery. **Note:** The user's ability to sit upright has a major influence on the back height and it can therefore differ considerably	From front of seat to top of footrest. **Remember:** to include the cushion height

Overall width:

Max. Width	700 mm
Max. Height	920 mm
Max. Lenght	930 mm

Weights:

Minimum weight:	from 8.5 kg

Folded size:

Minimum width:	ca. 310 mm

NOTES:

Max. seat height difference rear to front is 120 mm

No negative seat angle is possible

Manufacturing tolerances of +/- 10 mm

Product is crash tested according to ISO 7176-19 and therefore approved for transportation in a vehicle.

For transport without a user the chair must be safe clamped in the vehicle.

●	= Standard	○ = No cost option	□ = Cost option		R. Nr.	€	

	SEAT UPHOLSTERY						
	Seat sling						
YNG020101	●	1 Utility bag					**For more information**
YNG020102	□	With two utility bags		*(only from SW 340 mm)*			**about JAY**
YNG020103	□	One utility bag and one catheter bag		*(only from SW 340 mm)*			**please contact our**
YNG020104	○	Without seat sling					**customer service**
		For JAY Seating, see Jay order form					
	Seat cushion with cover, black						
		a) Foam composite Thickness: *YNG020201* □ 30mm *YNG020203* □ 50mm		*(medium)*			
	Seat accessories						
YNG020301	□	Positioning belt with lock					
YNG020303	□	Jay Fit belt 90° attachment *(attached to the seat rail)*		*(starts with SW 260; use with cushion only)*			
YNG020304	□	Jay Fit belt 45° attachment *(attached to the seat rail)*		*(starts with SW 260; use with cushion only)*			
YNG020305	□	Seat plate (for mounting of seat shell adapters, build in growth)		*(only from SW 240 mm)*			
	SiMo - Seat and backrest system by Meybrand		*(Seat and back sling not required)*				
SIM09000-999	□ Black (Cushion cover always black) SIM09000-1001	□ Red (Cushion cover always black)					
SIM09000-1000	□ Green (Cushion cover always black) SIM09000-1002	□ Red with design (Complete)					

	Backrest (range)	**225 - 275**	**275 - 325**	**325 - 375**	**375 - 425**		
	Back height set at (mm)	○ 225	○ 275	○ 325	○ 375		
		○ 250	○ 300	○ 350	○ 400		
		◉ 275	○ 325	○ 375	○ 425		

	BACKREST						
	Backrest frame						
YNG030101	○	Standard: Non angle adjustable (90°), non folding backrest					
YNG030102	□	Angle adjustable		*(Only in combination with sideguard YNG040202)*			
		□ 87° □ 90° □ 95° □ 100° □ 105°					
B4Me only	□	Build for me Option: Reclining back		*(For seat depth 300 mm and above)*			
Additional lead		Infinite back recline from -3° to +20° **(2)**		*(only in combination with sideguard YNG040201)*			
time 10 days							
	Pushhandles						
YNG030201	○	Without pushhandles		*(not in combination with half folding back)*			
YNG030203	○	Long					
YNG030204	□	Fold-down pushhandles		*(only up from BH 350 mm)*			YNG030204
YNG030205	□	Height-adjustable pushhandles		*(only up from BH 250 mm)*			
YNG030206	□	Height-adjustable pushhandles side angled		*(not in combination with drumbrakes)*			
YNG030207	□	JAY Hardware with height adj. pushhandles		*(only up from BH 300 mm)*			YNG030205
YNG030208	□	JAY Hardware with height adj. PH side angled					
	Backrest upholstery						
YNG030306	●	Standard backrest upholstery					
YNG030316	□	EXO Backrest sling, padded, adjustable, 1 accessory bag, black (EXO Evo version)					
		Colour, binding tape: ● Black ○ Orange ○ Silver ○ Red ○ Blue					
YNG030317	□	EXO PRO Backrest, padded, adj., breathable spacer fabric, 1 accessory bag, black (EXO Evo version)					
		Colour, binding tape: ● Black ○ Orange ○ Silver ○ Red ○ Blue					
YNG030305	○	Without back upholstery					
	Headrest						
YNG030401	□ Medium	*YNG030402* □ Large					YNG030401
YNG030403	□ Stabiliser bar						

(1): starting with SW 320 mm; reduces the seat depths of approx 10 mm because of the padding
(2): not in comination with Safari wheel lock; Seat depth enlargement (50 mm); Standard backrest upholstery

For more information
visit our webpage
www.sunrisemedical.eu

© Sunrise Medical 2024 Page 2/ 5

Seat height matrix - front seat height (in mm)
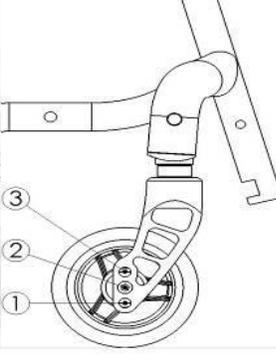
	Fork Position	Castor size 4"	5"	6"
Fork (32/111 mm)	2	400	410	X
	1	410	420	X
Fork (45/111 mm)	3	390	X	X
	2	400	410	X
	1	410	420	430
Fork (45/123)	3	400	410²	X
	2	410	420	430
	1	420	440	450
Fork (45/138 mm)	3	420	430	430
	2	430	440	450
	1	440	450	460
Fork (45/174 mm)	4	X	450	460
	3	440	460	470
	2	460	470	480
	1	470	480	500

Details:
* SH-details with 10 mm spacer between fork and frame - spacer could be mounted underneath the fork => reduced SH - 10 mm
* without cushion
* without seat angle (0°)
* X = No Go
² Not available with 5" soft rolls

Seat height back (in mm) with rear wheels 20", 22" and 24"

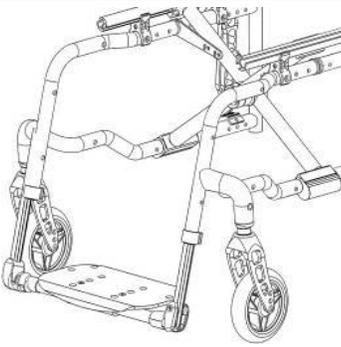| Axle plate position	rear wheel size 20"	22"	24"
8	320	355	X
7	330	37	X
6	350	380	410
5	X	400	425
4	X	415	435
3	X	430	445
2	X	440	455
1	X	455	470

Details
*measurements made with 1"-tyr   * without seat angle (0°)
* without cushion   * X = No Go
* without camber (0°)

Distance between seat and handrim (outside tube)

Axle plate position	rear wheel size 20"	22"	24"
8	125	140	X
7	110	130	X
6	100	115	145
5	X	100	130
4	X	90	120
3	X	80	105
2	X	65	95
1	X	50	80

Details
* without cushion   * X = No Go
* without camber (0°)

Y3-LLL matrix; platform footrest, angle adjustable

	Fork position	4"-Castor min. LLL	max. LLL	5"-Castor min. LLL	max. LLL	6"-Castor min. LLL	max. LLL
Fork 111 mm	3	320	340	X	X	X	X
	2	320	350	X	X	X	X
	1	320	360	X	X	X	X
Fork 123 mm	3	320	350	X	X	X	X
	2	320	360	X	X	X	X
	1	320	380	320	390	X	X
Fork 138 mm	3	320	360	X	X	X	X
	2	320	380	320	390	X	X
	1	320	390	320	400	X	X
Fork 174 mm	4	X	X	320	400	X	X
	3	320	400	320	410	320	340
	2	320	410	320	430	320	430
	1	320	420	320	440	320	450

●	= Standard	○ = No cost option	□ = Cost option	R. Nr.	€

	ARMREST AND SIDEGUARDS			
	Armrest			
YNG040101	□ Armrest height adjustable, short, screw-on	*(only with YNG040201, YNG040202 and YNG040211)*		
	Sideguards			
YNG040201	□ Straight sideguard aluminium with cloth protection			
YNG040202	□ Aluminium sideguard for angle adjustable back at fixed angles with cloth protection			
YNG040204	□ Fender, composite, screw-on, back			
YNG040210	□ Mud guard (fender - covers the complete wheel)	*(composite, black, screw on)*		
YNG040203	□ Leightweight carbonfibre look sideguard with integrated clothing guard **(1)**			
YNG040211	□ Straight sideguard aluminium with fender (Pair) - Tool height adj armrest possible			
YNG040212	□ Straight sideguard aluminium with fender (Pair) for Safari wheellock			
YNG040205	□ Plastic sideguards detachable (Quickie style)			
	Sideguards options and accessories			
YNG040206	□ Height adjustable tray table, slide-on for SW 220 - 360 mm not SW 380 & 400 mm)			
	Therapy table flip-down for SW 260 - 400 mm			
	Attachment: YNG040207 □ right-hand YNG040208 □ left-hand			

	LEGREST & FOOTPLATES			
	Platform footrest, angle adjustable (only in positioning 3 - back page 2)			
YNG050102	□ Composite board *(Abdu frame SW 260 - 400; Std 300 - 400)*			
YNG050103	□ Carbon board *(Abdu frame SW 280 - 400, Std 320 - 400)*			
YNG050115	□ Foot positioning plate			
YNG050106	● Platform footrest "Youngster 3" *(SW 380 & 400 with abduction is supplied w aluminium board)*			
YNG050107	□ Locking system for spasticity for platform footrest			
YNG050108	□ Swing Away mechanism *(not with Platform footrest, angle adjustable)*			
YNG050111	□ Divided footplate "Youngster 3" - composite *(not in SW 220 mm)*			
	Locking system for spasticity for divided footrest			
YNG050112	□ Right attachement			
YNG050113	□ Left attachement			
YNG050114	□ Lock for divided footrest (Right and left)			
YNG050101	□ Divided footplate Alu "Youngster3" *(starts w abdu frame SW 260, Std SW 300 mm)*			
	Clamp for platform footrest "Youngster3" □ Short (90 mm) □ Long (121 mm)			
	YNG050116 YNG050117			

|	**Lower leg length (LLL) (in mm)**	
	○ 110 ○ 120 ○ 130 ○ 140 ○ 150 ○ 160 ○ 170 ○ 180 ○ 24	
	○ 190 ○ 200 ○ 210 ○ 220 ○ 230 ○ 240 ○ 250 ○ 260 ○ 32	
	○♯ 280 ○ 290 ○ 300 ○ 310 ○ 320 ○ 330 ○ 340 ○ 350 ○ 40	
	○♯ 370 ○ 380 ○ 390 ○ 400 ○ 410 ○ 420 ○ 430 ○ 440	

	FRAME (with smart and nice folding fixation and frame protection for the rear frame end and the axle plate)			
YNG010101	● Standard folding frame (straight)	*(from SW 260 - 400 mm)*		
YNG010102	○ Abduction folding frame	*(from SW 220 - 400 mm)*		

	Seat depth enlargement (50 mm)	*(all measurements are in mm)*		
YNG010201	□ Seat depth enlargement (50 mm) **(2) (3) (4)**			
	Increases seat depth by 50 mm allowing better COG adjustment when used in combination			
	with seat shells	*(not in combination with leight weight sideguard)*		
		(only in combination with adjustable upholstery)		

(1):	not with combination cloth protection, armrest & plastic sideguard
(2):	not with Safari wheel-lock
(3):	only with YNG040201 & YNG040202
(4):	not with mud guard

For more information
visit our webpage
www.sunrisemedical.eu

Y3-platform footrest "Youngster 3 " style

Footplate position 1

Fork	Fork position	4"-Castor				5"-Castor				6"-Castor			
		Clamp short		Clamp long		Clamp short		Clamp long		Clamp short		Clamp long	
		min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL
Fork 111 mm	3	150	260	120	290	X	X	X	X	X	X	X	X
	2	150	260	120	290	150	260	120	29	X	X	X	X
	1	150	260	120	290	150	260	120	29	150	260	120	290
Fork 123 mm	3	150	260	120	290	150	260	120	29	150	260	X	X
	2	150	260	120	290	150	260	120	29	150	260	120	290
	1	150	260	120	290	150	260	120	29	150	260	120	290
Fork 138 mm	3	150	260	120	290	150	260	120	29	150	260	120	290
	2	150	260	120	290	150	260	120	29	150	260	120	290
	1	150	260	120	290	150	260	120	29	150	260	120	290
Fork 174 mm	4	150	X	X	X	150	260	120	29	150	260	120	290
	3	150	260	120	290	150	260	120	29	150	260	120	290
	2	150	260	120	290	150	260	120	29	150	260	120	290
	1	150	26	120	290	15	260	120	29	150	260	120	290

Footplate position 2

Fork	Fork position	4"-Castor				5"-Castor				6"-Castor			
		Clamp short		Clamp long		Clamp short		Clamp long		Clamp short		Clamp long	
		min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL
Fork 111 mm	3	140	240	110	260	X	X	X	X	X	X	X	X
	2	140	240	110	260	140	240	110	260	X	X	X	X
	1	140	240	110	260	140	240	110	260	140	240	110	260
Fork 123 mm	3	140	240	110	260	140	240	110	260	140	240	X	X
	2	140	240	110	260	140	240	110	260	140	240	110	260
	1	140	240	110	260	140	240	110	260	140	240	110	260
Fork 138 mm	3	140	240	110	260	140	240	110	260	140	240	110	260
	2	140	240	110	260	140	240	110	260	140	240	110	260
	1	140	240	110	260	140	240	110	260	140	240	110	260
Fork 174 mm	4	140	X	X	X	140	240	110	260	140	240	110	260
	3	140	240	110	260	140	240	110	260	140	240	110	260
	2	140	240	110	260	140	240	110	260	140	240	110	260
	1	140	240	110	260	140	240	110	260	140	240	110	260

Footplate position 3

Fork	Fork position	4"-Castor				5"-Castor				6"-Castor			
		Clamp short		Clamp long		Clamp short		Clamp long		Clamp short		Clamp long	
		min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL	min. LLL	max. LLL
Fork 111 mm	3	250	360	220	360	X	X	X	X	X	X	X	X
	2	250	370	220	370	250	350	220	380	X	X	X	X
	1	250	380	220	380	250	370	220	390	X	X	X	X
Fork 123 mm	3	250	370	220	350	250	350	220	380	X	X	X	X
	2	250	380	220	360	250	370	220	400	250	350	220	380
	1	250	390	220	390	250	410	220	410	250	360	220	400
Fork 138 mm	3	250	360	220	390	250	360	220	400	250	350	220	380
	2	250	400	220	400	250	400	220	410	250	370	220	400
	1	250	410	220	420	250	410	220	420	250	390	220	420
Fork 174 mm	4	X	X	X	X	250	420	220	420	250	380	220	420
	3	250	420	220	420	250	430	220	430	250	410	220	440
	2	250	430	220	430	250	440	220	440	250	450	220	450
	1	250	440	220	440	250	460	220	460	250	470	220	470

Zippie Youngster 3

● = Standard ○ = No cost option □ = Cost option

				R. Nr.	€

Frame accessories *(choose either tip assit or anti- tip tubes, not both)*

Tip assist (step tube)

YNG010303

Code		Description	Note		
YNG010301	□	Left □ *YNG010302* Right			
YNG010305	□	Pair			
YNG010303	□	Crutch holder with Velcro	*(only in combination with tip assist)*		

Anti-tip tubes, swing-away

	□	Anti-tip tubes, swing-away			
		□ *YNG010306* Left *YNG010307* □ Right			
		□ *YNG010308* Pair			
YNG010309	□	Transit wheel	*(not with anti tip and tip assist)*		

YNG010306

YNG010309

PREPARATION FOR ATTITUDE ADD-ON BIKE (4)

YNG090911	□	Preparation for ATTITUDE, without ATTITUDE order **(4)**	*(docking pins assembled)*		
YNG090912	○	Preparation for ATTITUDE, with ATTITUDE order **(4)**	*(docking pins assembled; separate ATTITUDE order)*		

FORK *(compare with your choice on the first page)*

	○	Fork Carbotecture®	*(only 111 mm)*		
YNG080029	○	Fork Aluminium			

STANDARD CASTOR *(compare with your choice on the first page)*

YNG080201	○	Solid	*(for 45 mm fork version only)* *(only for 4"& 5")*		
YNG080202	○	Soft solid	*(for 45 mm fork version only)* *(only for 5"& 6")*		

Light ups

YNG080203	□	Solid	*(not available for 6")*		

Castor with aluminium rim

YNG080204	□	Solid	*(only for 4" and 5")*		
YNG080205	□	Soft roll	*(for 45 mm fork version only)* *(only for 4" and 5")*		

REAR WHEELS

YNG070110	○	without rear wheels			
YNG070101	○	Straight spoked	*(only 22")*		
YNG070102	○	Cross spoked	*(pair)* *(only 22" & 24")*		
YNG070103	○	Design wheel	*(pair)* *(only 24")*		
YNG070104	○	Light weight wheel **(2)**	*(pair)* *(only 22" & 24")*		
YNG070105	□	Proton wheel (super light weight) **(2)**	*(pair)*		
YNG070111	□	Drum break wheels for attendent person	*(pair)* *(only 22" & 24")*		
YNG070106	□	Mountain Bike wheel	*(only with 24", mountainbike tyres & aluminium rim, black coated)*		
YNG070107	□	Additional mountain bike wheel pair	*(only with 24" &mountainbike tyres)*		
		One-arm drive with quick-release axle, one-arm brake not included **(3)**			
		YNG070108 □ Left *YNG070109* □ Right			

TYRES *(choose only one tyre type)*

YNG070201	○	Right Run			
YNG070202	○	Solid tyres **(1)**	*(only 22" & 24")*		
YNG070112	□	Schwalbe One	*(only 24")*		
YNG070205	□	Marathon plus evolution (puncture proof)	*(only 24")*		

YNG070205

YNG090163	□	Spares-kit: 1 extra tyre (same as on the chair) and 1 extra inner tube	*(not with solid tyres)*		

HANDRIM

YNG070301	○	Aluminium silver anodized **(2)**			
YNG070302	○	Aluminium silver powdercoated **(2)**			
YNG070303	○	Coloured aluminium pushrim. colour code:			
YNG070304	○	Stainless steel	*(only 22" & 24")*		
YNG070305	□	Titanium	*(only 22" & 24")*		
YNG070306	□	Titanium clear powdercoated	*(only 22" & 24")*		
YNG070307	□	Supergrip	*(only 22" & 24")*		
YNG070308	□	Maxgrepp	*(only 22" & 24")*		
Hand rim mounting		*YNG070401* Standard = 17mm *YNG070402* ○ Wide = 27mm			
		YNG070403 □ Close = 7mm	*(only with 24" stainless steel)*		
YNG070309	□	Handrim cover	*(only 22" & 24")*		

WHEEL CAMBER *(choose only one option)*

YNG070501	○	0°			
YNG070502	○	1°			
YNG070503	○	2°			
YNG070504	○	3°			
YNG070505	○	4°			

Quick release axle

YNG070506	○	Std			
YNG070507	□	Quad			

(1):	not with Lightweight and Proton	For more information
(2):	not with handrim mounting wide for Lightweight and Proton wheels	visit our webpage
(3):	no colour coat, no camber adjustment, no drum brakes. Only with cross-spoked	www.sunrisemedical.eu
	rear wheel available min. SW = 279	**© Sunrise Medical 2024 Page 4/5**
(4)	not with short frame in combination with 24" wheels, not with knee-lever wheel-lock	

ARMREST AND SIDEGUARDS
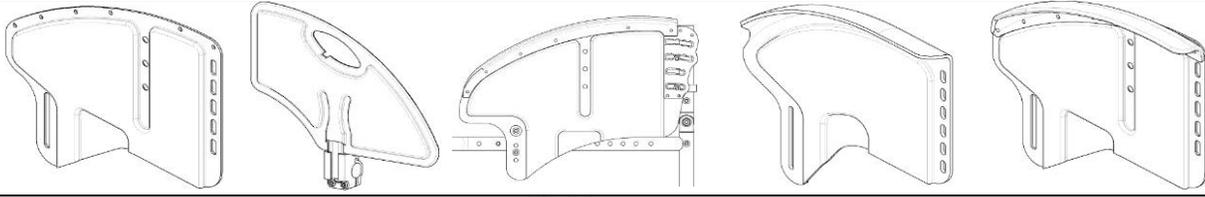
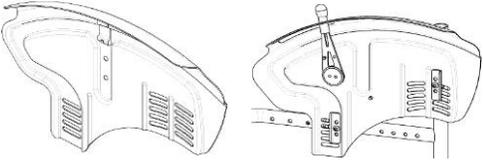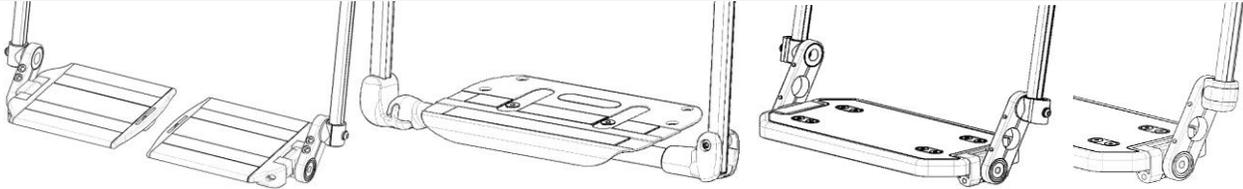YNG040201   YNG040205   YNG040202   YNG040203   YNG040204

LEGREST & FOOTPLATES
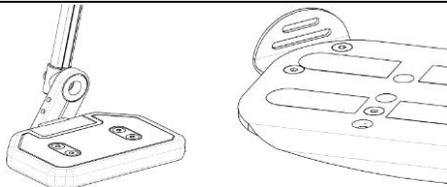
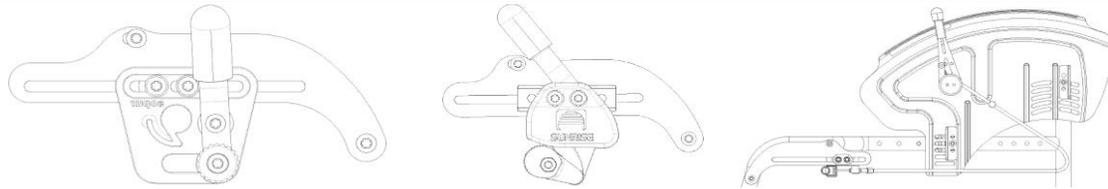YNG050101   YNG050102 / YNG050103   YNG050106   YNG050108
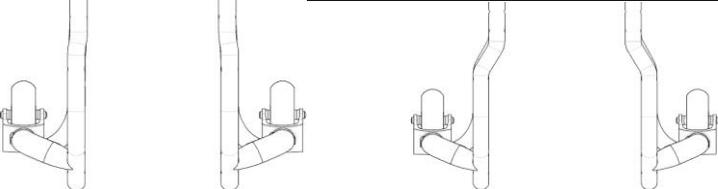
YNG050111   YNG050115

WHEEL LOCKS

YNG060101   YNG060102   YNG060105

FRAME		BACKREST	Seat depth growth
			YNG010201
YNG010101	YNG010102	YNG030101 B4me	

Zippie Youngster 3

● = Standard   C = No cost option   ☐ = Cost option

							R. Nr.	€
Spoke guard					*(only available in 22 & 24")*			
YNG070601	☐	Transparent						
			YNG070614	☐ Galactica	YNG070625	☐ Cheese		
YNG070604	☐	Princess			YNG070626	☐ Jungle Fever		
YNG070605	☐	Happy Lions						
YNG070606	☐	Monkeys	YNG070617	☐ Pirates	YNG070628	☐ Feather		
YNG070607	☐	Oriental						
YNG070608	☐	Superhero	YNG070619	☐ Graffiti	YNG070630	☐ Chrome wheel		
YNG070609	☐	Hot wheels	YNG070620	☐ Basketball	YNG070631	☐ Basketball 2		
YNG070610	☐	Pool	YNG070621	☐ Flying water	YNG070632	☐ Space		
YNG070611	☐	Silk						
YNG070612	☐	Tiger	YNG070623	☐ Zebra		*(see NEW Spokeguard brochure)*		

					R. Nr.	€
WHEEL LOCKS				*(choose only one option)*		
YNG060101	O	Standard wheel lock				
		Knee lever wheel lock				
YNG060104	☐	angled to the inside	YNG060102	☐ angled to the outside		
YNG060105	☐	Safari wheel lock (Wheel lock integrated into sideguard)				
YNG060106	☐	Attendant wheel lock with Safari wheel lock		*(incl. YNG060105)*		
YNG060107	☐	Drumbrake (for care person, quick-release axle)		*(only 22" & 24")*		
		Wheel lock accessories				
YNG060201	☐	Extension for knee lever wheel lock, slip-on, swing-away		*(only on kneeleaver whl)*		

			R. Nr.	€	
ACCESSORIES					
	●	Tool kit			
YNG090101	☐	High pressure pump			
YNG090102	☐	Air pump			
YNG090103	☐	Back pack			YNG090106
YNG090104	☐	Net back bag			
YNG090107	☐	Mobile phone bag			

COLOURS

	Frame	Handrim	Hub/rim			Frame	Handrim	Hub/rim
				24	Tutti Frutti Orange	O	☐	
02 Brilliant Silver	O	☐		27	Graphitmetallic	O	☐	
03 Silver matt	O	☐		29	Black	O	☐	
06 Sun Yellow	O	☐		31	Matt black	O	☐	
14 Blue	O	☐	☐	32	Signal white	O	☐	☐
15 Brilliant Marine	O	☐		33	Pink	O	☐	☐
16 Matt Marine	O	☐		34	Dark chocolate metallic	O	☐	
19 Brilliant Purple	O	☐		35	Skyblue	O	☐	
21 Red Ruby	O	☐		36	Cyan-Metallic	O	☐	
22 Brillant Red	O	☐	☐	37	Marsred	O	☐	
23 Matt Red	O	☐	☐	40	Kiwi	O	☐	
				41	Flamingo-Glitter	O	☐	
				42	Matt-Anthrazit	O	☐	
				46	Mamba Green (new)	O	☐	

Anodized colour package for fork and axle plate

YNG090507	Silver Matt	☐
YNG090508	Orange	☐
YNG090509	Black	●

Comments for special build:

Zippie Youngster 3 - Basic Price

Option price	
Share of Packaging	
Exclusive VAT	
VAT.	
Total Price	€

Sunrise Medical Customer service
Address: Ul. Walczaka 114a,66 400, Gorsaw, Gorzów Wlkp. Polen
Tel. +48 95 737 25 14   E-mail: cs.pl@sunrise-medical.pl
Website: sunrisemedical.eu

For more information
visit our webpage
www.sunrisemedical.eu
© Sunrise Medical 2024   Page 5 / 5